

Cobalt™ Co₄ Instrument Microphone



C O B A L T™
W I R E D
M I C R O P H O N E S

General Product Description

Designed to yield outstanding performance in applications requiring the miking of acoustic and electric instruments, as well as vocal performances. Excellent for stage or studio, the Co₄'s versatility will make it a "must have" in any microphone mix.

Microphone Use and Placement

Please note that miking techniques are a matter of personal preference. These are merely guidelines to assist in the placement of the microphone to gain optimal performance.

Usage	Optimal Placement
Electric Guitar and Bass Guitar Amplifier	Place microphone approximately 1-2" from and at a 90° degree angle to the speaker cone. To reduce boominess, move the microphone off axis to the cone from 90° to 45°, or move mic from center of cone to either edge.
Tom-Toms	On double headed Toms place mic over the top of drum 1-3" and at a 45° angle to the drum surface and 1-2" in from the drum edge. On single headed Toms use above method or place mic inside Tom from underneath at a 90° angle from the center of head, 3-5", away.
Snare Drum	Place mic 1-3" above the heads, 1-2" in from the rim. Aim each mic at the top heads angled down about 45°. If the drum rings, tape deadening material to the head or use damping rings. For more "snare" sound place a 2nd mic underneath aimed up at the bottom of head.
Cymbals	Place microphone one to two feet above the top of cymbals.
High-Hat	Place 5 inches above outside edge at a 45° down angle.
Brass	6-24" away, and on axis with the bell of the instrument.
Acoustic Guitar	Place mic 6-12" from where finger board joins the body.



Specifications



Element	Dynamic Neodymium magnet structure
Frequency Response	50 Hz to 18 kHz
Polar Pattern	Cardioid
Impedance	Low-Z balanced (600 Ohms)
Sensitivity Open Circuit Voltage	2.2 mV/Pascal @ 1.0kHz
Microphone Connector	3-pin, XLR-type
Polarity	Pin 2 positive, referenced to pin 3 with positive pressure on diaphragm
Finish	Durable polyurethane paint
Materials	Die cast zinc housing
Dimensions Length Diameter Shank	5.8 in. (148 mm) .92 in. (23 mm) .46 in. (12 mm)
Weight Net	12 oz. (340 grams)
Accessories included	Stand adaptor (black)

Standard Placement & Use Guidelines

1. Always point the microphone at the desired source of sound, and away from any unwanted sources.
2. The microphone should be located close to the sound source to minimize interference from other potential sound sources.
3. Use the 3-to-1 rule when using multiple microphones. Place each microphone three times farther from other microphones as from the desired sound source.
4. Minimize over-handling of the microphone to reduce unwanted mechanical noise.
5. Working close to the microphone will increase the bass tone and also provide increased gain-before-feedback.

Warranty

Telex/EV wired microphones are guaranteed against malfunction from any cause for a period of one (1) year from the date of original purchase. This limited warranty does not cover cables, cable connectors, or switches. If your Telex/EV product fails within this period, contact our Technical Assistance group at 1-800-392-3497 or toll free at 1-800-685-2606 for details on repair, replacement, or refund. For customers outside the U.S., please call the number listed in the bottom left column of this document.

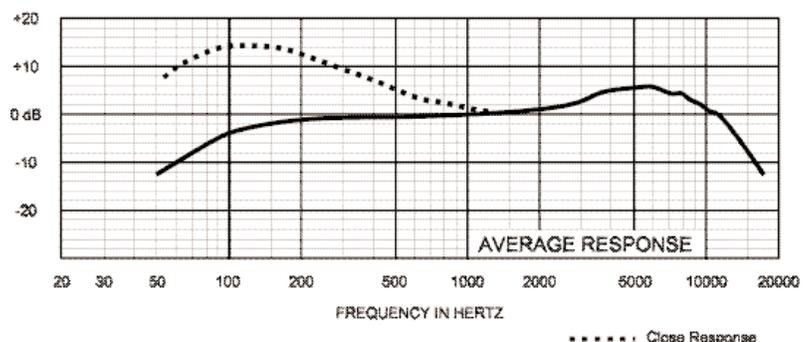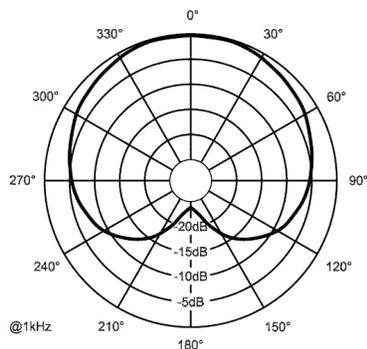

Step up to Electro-Voice®

USA 12000 Portland Ave South, Burnsville, MN 55337, Phone: 952-884-4051, FAX: 952-884-0043
Canada 705 Progress Avenue, Unit 46, Scarborough, Ontario, Canada, M1H2X1, Phone: 416-431-4975, 800-881-1685, FAX: 416-431-4588
Switzerland Keltenstrasse 11, CH-2563 IPSACH, Switzerland, Phone: 41/32-331-6833, FAX: 41/32-331-1221
Germany Hirschberger Ring 45, D94315, Straubing, Germany, Phone: 49 9421-706 392, Fax: 49 9421-706 287
France Parc de Courcerin, Allée Lech Walesa, Lognes, 77185 Marne La Vallée, France, Phone: 33/1-6480-0090, FAX: 33/1-6480-4538
Australia Unit 23, Block C, Slough Business Park, Slough Avenue, Silverwater, N.S.W. 2128, Australia, Phone: 61/2-9648-3455, FAX: 61/2-9648-5585
Hong Kong Unit E & F, 21/F, Luk Hop Industrial Bldg., 8 Luk Hop St., San PO Kong, Kowloon, Hong Kong, Phone: 852-2351-3628, FAX: 852-2351-3329
Japan 2-5-60 Izumi, Suginami-ku, Tokyo, Japan 168, Phone: 81-3-3325-7900, FAX: 81-3-3325-7789
Singapore 3015A Ubi Rd 1, 05-10, Kampong Ubi Industrial Estate, Singapore 408705, Phone: 65-746-8760, FAX: 65-746-1206
Mexico Av. Parque Chapultepec #66-201, Col. El Parque Edo. Mex. 53390, Phone: (52) 5358-5434, FAX: (52) 5358-5588
UK 4, The Willows Centre, Willow Lane, Mitcham, Surrey CR4 4NX, UK, Phone: 44 181 640 9600, FAX: 44 181 646 7084
Africa, Mid-East 12000 Portland Ave South, Burnsville, MN 55337, Phone: 952-887-7424, FAX: 952-887-9212
Latin America 12000 Portland Ave South, Burnsville, MN 55337, Phone: 952-887-7491, FAX: 952-887-9212

www.electrovoice.com • Telex Communications, Inc. • www.telex.com
 ©Telex Communications, Inc. 1/2001 Part Number 38109-907

U.S.A. and Canada only.
 For customer orders, contact the Customer Service department at
 800/392-3497 Fax: 800/955-6831
 For warranty repair or service information, contact the Service
 Repair department at 800/685-2606
 For technical assistance, contact Technical Support at 800/392-3497

Specifications subject to change without notice.

Designed in the U.S.A. Made in Taiwan.