
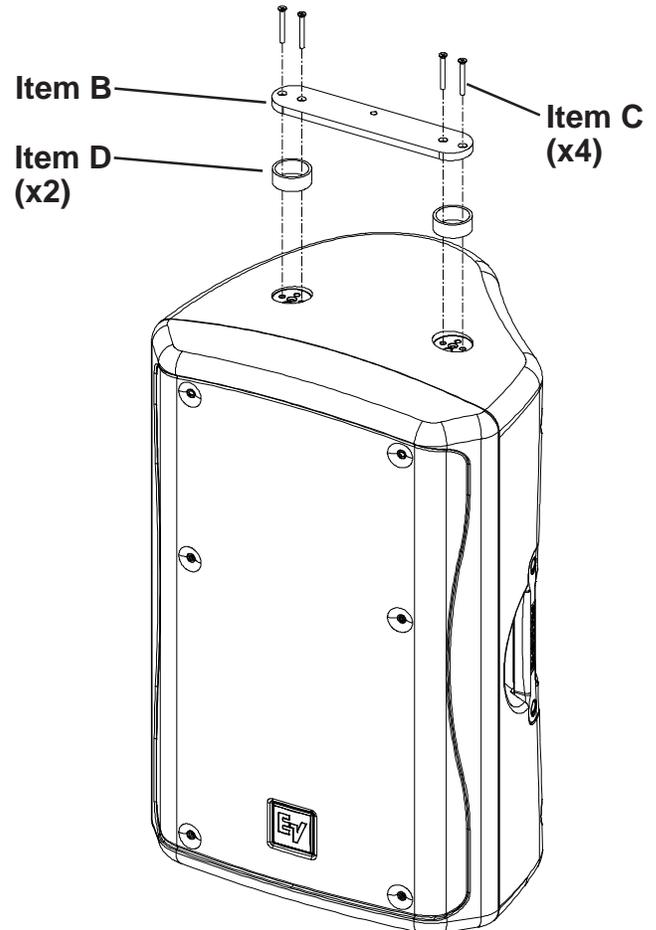


### MB5 Wall/Ceiling Mounting Bracket Kit

The MB5 Wall/Ceiling Mounting Bracket Kit features robust brackets and hardware that allow for a Zx5 loudspeaker to be quickly and easily mounted to a wall or ceiling in almost any position to obtain the desired sound coverage.

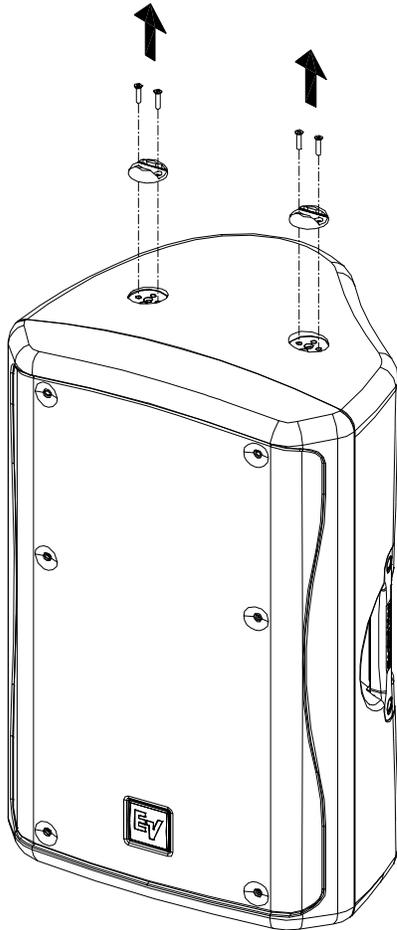

### Step 1: Attach Spanning Bracket

Remove original Single-Stud Fittings by removing the four screws shown. Using the four screws (Item C) and two spacers (Item D) supplied, attach the spanning bracket (Item B) to the top of the speaker as shown above.

**Orient the spanning bracket so that the center threaded hole is towards the rear of the speaker.**

### MB5 Mounting Bracket Kit Includes



Item	Description	Qty.
A	U-Bracket Assembly	1
B	Spanning Bracket	1
C	Screw, 10-32 x 1-3/4", Flat Head	4
D	Spacer	2
E	Bolt, 5/16-18 x 1", Hex Head	1
F	Washer, 5/16	1

## Step 2: Mounting the U-Bracket Assembly


Attach the U-Bracket (Item A) to the wall or ceiling using fasteners (not supplied) that are suitable for the construction materials the bracket will be fastened to (See dimension diagrams for mounting hole patterns and dimensions).

## Step 3: Mounting the Zx5 Loudspeaker

Lift the Zx5 so that the bottom of the Zx5 is pointing towards the plastic post on the U-bracket. Angle the bottom of the Zx5 towards the post and then push the Zx5 against the plastic post and between the arms of the U-bracket until the plastic post slides into the pole mount hole on the bottom of the Zx5. Move the Zx5 into position between the U-bracket arms and screw the bolt (Item E) [with washer (Item F) attached] through the U-bracket hole and into the threaded Spanning Bracket hole. Hand-tighten the bolt, adjust the Zx5 to the desired angle, and then finish tightening the bolt with the use of a wrench until the Zx5 no longer rotates.

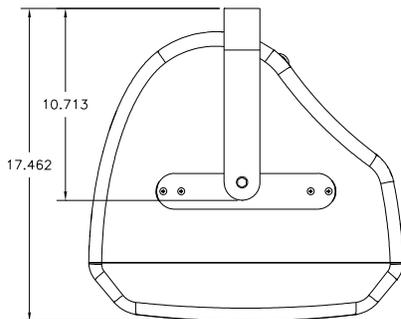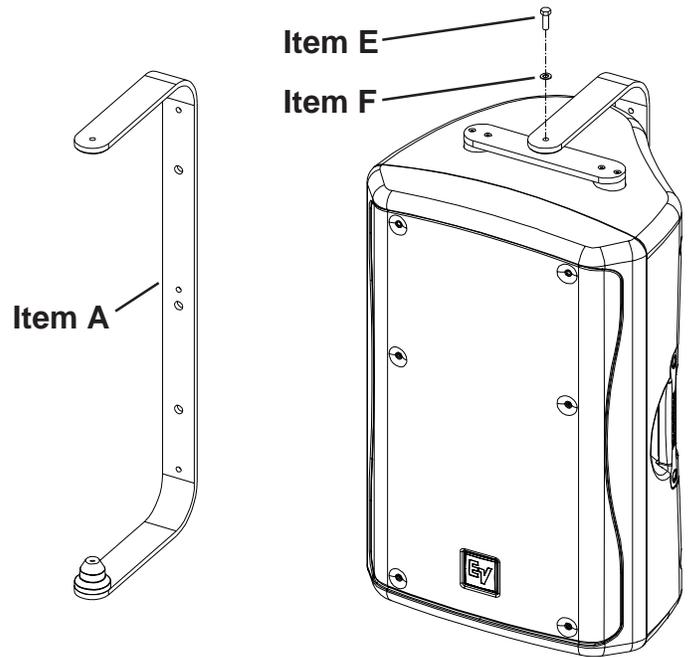

MB5 Top View Dimensions

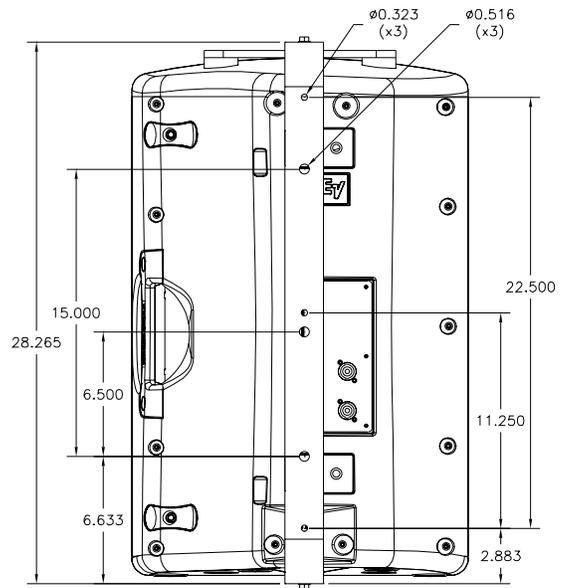

MB5 Rear View Dimensions



**WARNING:** Suspending any object is potentially dangerous and should only be attempted by individuals who have a thorough knowledge of the techniques and regulations of rigging objects overhead. Electro-Voice® strongly recommends that Zx5 speakers be suspended taking into account all current national, federal, state and local regulations. It is the responsibility of the installer to ensure that Zx5 speakers are safely installed in accordance with all such regulations. If Zx5 speakers are suspended, Electro-Voice® strongly recommends that the system be inspected at least once a year. If any sign of weakness or damage is detected, remedial action should be taken immediately. Please consult the Zx5 owner's manual, which details the various hardware kits that are available to safely suspend Zx5 speakers and how each kit should be used.

**EV Electro-Voice®**

12000 Portland Avenue South, Burnsville, MN 55337  
Phone: 952/884-4051, Fax: 952/884-0043

[www.electrovoice.com](http://www.electrovoice.com)

© Telex Communications, Inc. 1/2005

Part Number 38110-375 Rev B

U.S.A. and Canada only. For customer orders, contact the Customer Service department at **800/392-3497 Fax: 800/955-6831**  
Europe, Africa and Middle East only. For customer orders, contact the Customer Service department at **49 9421-706 0 Fax: 49 9421-706 265**

For warranty information, contact the Service Repair department at: **616/695-6831 or 800/685-2606**

For technical assistance, contact Technical Support at: **866/78AUDIO**

Specifications subject to change without notice.